cobas® infinity laboratory solution

Stop and Start Host/LIS Connection(s)

Stop Host/LIS Connection(s)

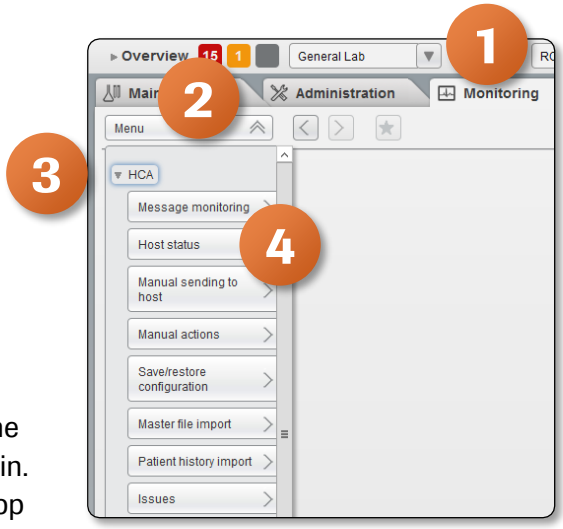

1. Once logged into **cobas® infinity** software, select the **Monitoring** tab
2. Click on **Menu**
3. Navigate to **HCA** (Host Connection Agents)
4. Select **Host status**
5. A list of configured hosts is shown. The **Enabled** column shows the status of all host connections because of ✓ icon
   - The ⏳ icon indicates the host is waiting to establish the definitive connection. Stop the connection and start again.
6. To stop a Host/LIS connection, select the connection from the top of screen
7. Click on **Disable**

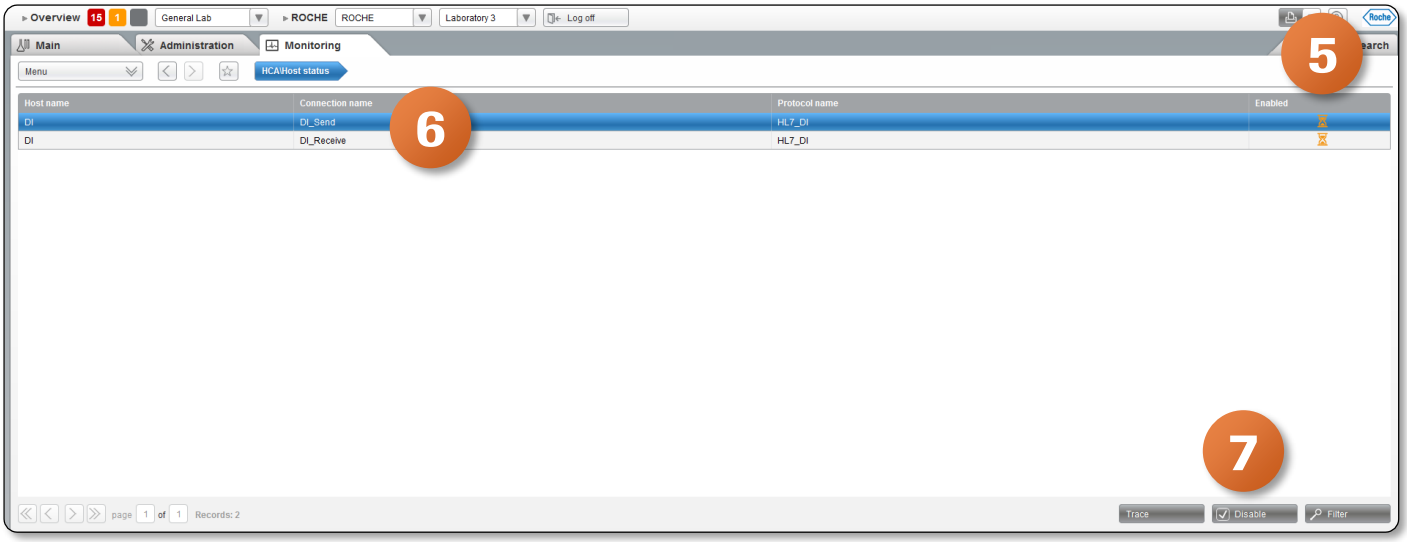

8. You will get a pop up asking if you really want to disable
9. Click on **Yes**
10. You can now see the ✗ icon which means this Host/LIS is disabled

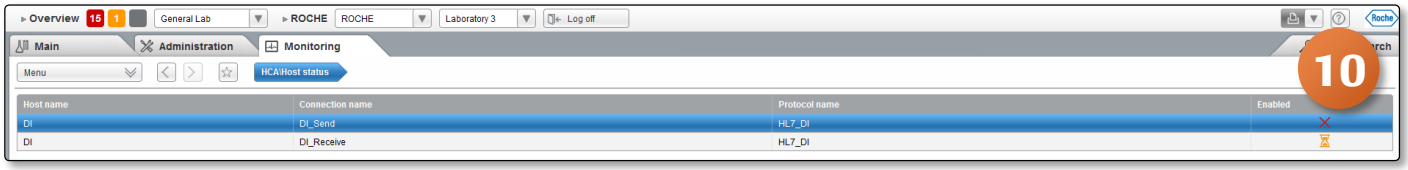

Stop and Start Host/LIS Connection(s)

Start Host/LIS Connection(s)

1. Once logged into **cobas® infinity** software, select the **Monitoring** tab
2. Click on **Menu**
3. Navigate to **HCA** (Host Connection Agents)
4. Select **Host status**
5. A list of configured hosts is shown. The **Enabled** column shows all hosts disabled because of ☒ icon
    - The ⧗ icon indicates the host is waiting to establish the definitive connection. Stop the connection and start again.
6. To start a Host/LIS connection, select the connection from top of the screen
7. Click on **Enable**

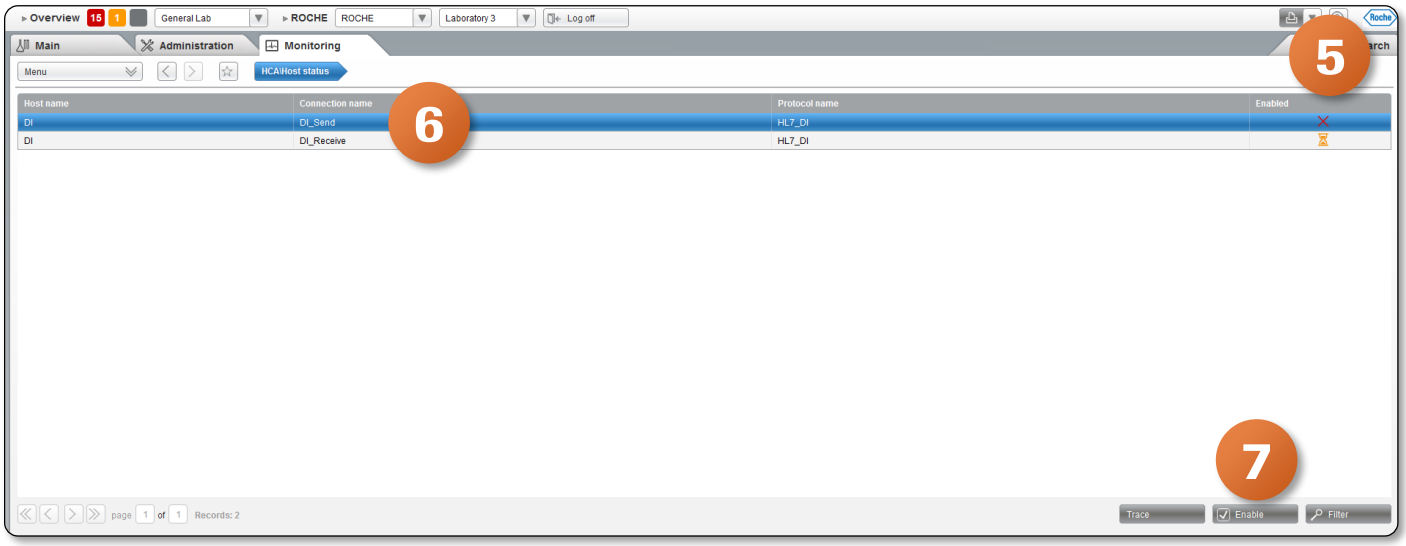

8. You can see that the status is now ☑ showing that the instrument is connected

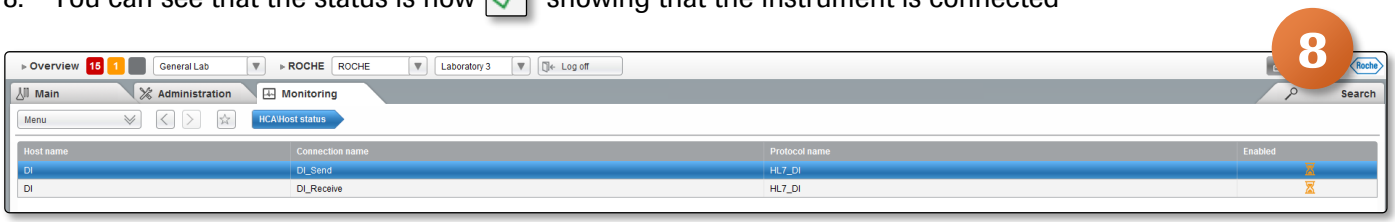

COBAS INFINITY is a trademark of Roche.
All other product names and trademarks are the property of their respective owners.
©2020 Roche Diagnostics. All rights reserved.